


OCHIAI弹簧销（直开口型）

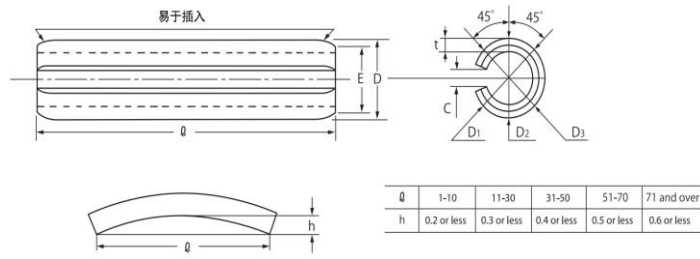

型号		1	1.2	1.5	1.6	2	2.5	3	3.5	4	4.5	5	6	8	10	12	13	
各尺寸	D	最大	1.2	1.4	1.7	1.8	2.25	2.75	3.25	3.84	4.4	4.84	5.4	6.4	8.6	10.6	12.5	13.7
	t	最小	1.1	1.3	1.6	1.7	2.15	2.65	3.15	3.7	4.2	4.7	5.2	6.2	8.3	10.3	12.3	13.4
	E	基本尺寸	0.2	0.25	0.3	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1	1.2	1.6	2	2	2.5
适用孔径	直径	1	1.2	1.5	1.6	2	2.5	3	3.5	4	4.5	5	6	8	10	12	13	
	公差	+0.08 0				+0.09 0				+0.12 0				+0.15 0		+0.2 0		

长度 l		称呼															
基本尺寸	公差	1	1.2	1.5	1.6	2	2.5	3	3.5	4	4.5	5	6	8	10	12	13
4	+0.5 0	○	○	○	○	○	○										
5		○	○	○	○	○	○			○							
6		○	○	○	○	○	○	○	○	○							
8		○	○	○	○	○	○	○	○	○	○	○	○				
10	+1 0	○	○	○	○	○	○	○	○	○	○	○	○	○			
12		○	○	○	○	○	○	○	○	○	○	○	○	○			
14			○	○	○	○	○	○	○	○	○	○	○	○			
15			○	○	○	○	○	○	○	○		○	○	○			
16				○	○	○	○	○	○	○	○	○	○	○	○		
18				○	○	○	○	○	○	○	○	○	○	○	○		
20					○	○	○	○	○	○	○	○	○	○	○	○	
22						○	○	○	○	○	○	○	○	○	○	○	○
24							○	○	○	○	○	○	○	○	○	○	○
25							○	○	○	○	○	○	○	○	○	○	○
26							○	○	○	○	○	○	○	○		○	
28							○	○	○	○	○	○	○	○	○	○	○
30							○	○	○	○	○	○	○	○	○	○	○
32							○	○	○	○	○	○	○	○	○	○	○
35								○	○	○	○		○	○	○	○	○
36								○	○	○	○	○	○	○	○	○	○
38								○	○	○		○	○	○		○	
40							○	○	○	○	○	○	○	○	○	○	
45								○	○	○		○	○	○	○	○	
50								○	○	○	○	○	○	○	○	○	
55	+1.5 0									○		○		○	○	○	
56												○	○	○	○		
60										○		○	○	○	○	○	
63												○	○	○	○	○	
65											○		○	○	○	○	
70											○		○	○	○	○	
75												○	○	○	○	○	
80													○	○	○	○	
85														○	○	○	
90															○	○	
95															○	○	
100																○	
110																	
120																	
130																	
140																	

材质：弹簧钢 硬度：HRC45-50（型号13产品的硬度为HRC40-50） 不锈钢（SUS304CS）

注意：

- 1、标有※记号型号的产品是OCHIAI的企业标准品
- 2、D最大值为弹簧销圆周外径的最大处直径，D最小值为D1、D2、D3的平均值
- 3、上表中填写有○以外长度的产品请联系详情是否可以生产
- 4、上表中填写有○的产品为弹簧钢材质产品的尺寸，有些规格可能没有不锈钢材质产品，请联系核对
- 5、市场通用性不大的产品可能没有库存，需要时请事先联系