


弹簧定位柱规格表



类型			本体			顶杆		使用温度	
			材质	硬度	表面处理	材质	硬度		
金属头	轻负荷用	PJL	S45C	HRC29~35	发黑	S45C	HRC76-63	-30~80℃	
	重负荷用	PJH							
	极重负荷用	PJX			镀镍				
树脂头	轻负荷用	NPJL							工程塑料
重负荷用	NPJH								
极重负荷用	NPJX	发黑							
			镀镍						

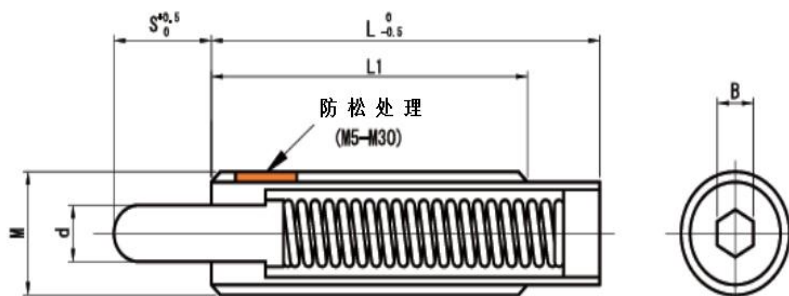

型号	M (普通)	S	d	L1	L		B	负荷 (N)					
					轻负荷	极重负荷		轻负荷用		重负荷用		极重负荷用	
								min	max	min	max	min	max
PJL PJH PJX NPJL NPJH NPJX	3	* (1.5)	1.1	10 (15)	10	15	0.9	0.49	1.0	0.78	2.9	2.3	4.5
		* (3)		15 (20)	15	20		0.29	1.0	0.78	2.9	1.8	4.5
	4	* (2)	1.6	15 (24)	24	24	1.3	1	2.0	2.9	8.8	5.2	13
		* (4)		24				24	0.59	2.0	2	8.8	5.2
	5	* (3)	2	20 (27)	20	27	1.5	2	9.8	4.9	19.6	9.1	24.5
		* (5)		27 (39)	27	39		2	9.8	2.9	19.6	8.8	24.8
	6	* (3)	2.5	25 (30)	25	30	2	5.9	9.8	7.8	29.4	14.2	39.5
		* (5)		30 (36)	30	36		2	9.8	4.9	29.4	14.1	39.4
	8	* (3)	3.1	25 (27)	25	27	2.5	5.9	9.8	14.7	29.4	35.3	41.2
		* (5)		27 (30)	27	35		2.9	9.8	7.8	29.4	14.7	41.2
	10	* (5)	3.8	30	30	53	3	5.9	14.7	8.8	49	15.7	62.8
		* (10)			43			2.9	14.7	7.8	49	12.7	62.8
	12	* (5)	5.5	30 (35)	30	43	4	5.9	14.7	18.6	49	37.2	98.1
		* (10)			43	58		2.9	19.6	7.8	49	14.7	98.1
		* (15)			51	78		2.9	19.6	4.9	49	14.9	98.1
		* (20)			60	70		5.9	39.2	12.7	78.5	23.5	147.2
	16	* (15)	8	35	60	70	5	3.9	39.2	12.7	78.5	21.6	147.2
		* (20)			85	90		4.9	39.2	9.8	78.5	12.7	147.2
		-30			125	125		2.9	39.2	6.9	78.5	19.6	147.2
		40			155	-		4.9	39.2	6.9	78.5	-	-
		50			159								
		60			185								
		70											
		80											
	20	(15)	10	45	60	80	6	12.7	78.5	24.5	147.1	12.7	245.3
		20			72	-		11.7	78.5	22.6	147.1	-	-
		30			96								
		40			120								
7	60	84	19.6	98.1	44.1		196.1						
24	(15)	10	45	75	-	10	19.6	98.1	47.1	215.7	14.5	314	
	20			100			17.7	98.1	44.1	215.7	-	-	
	30			124									
	40			124									
30	15	10	45	66	-	14	27.5	117.7	44.1	274.6			-
	20			78			27.5	117.7	53	274.6			
	30			100			27.5	117.7	45.1	274.6			
	40			123			27.5	117.7	47.1	274.6			

注： PJX、NPJL、NPJH型号的产品只有（ ）内的规格。
NPJX、NPJX型号的产品只有带 * 号数字的规格。