


IWT 弯曲BE型挡圈规格表 (轴用)

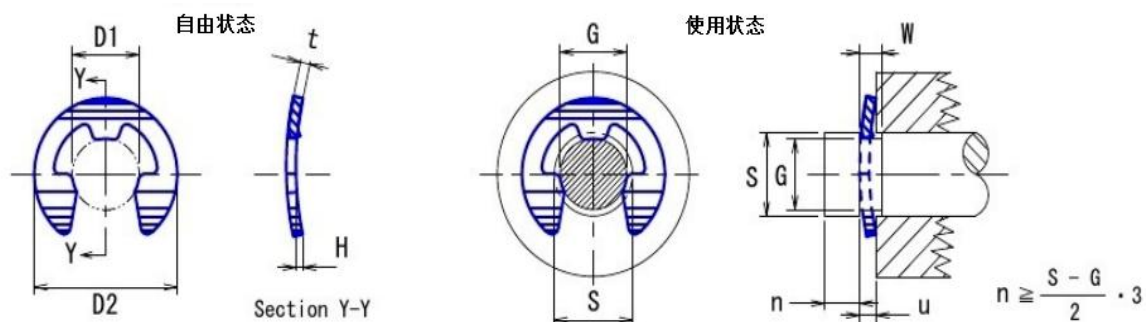

单位: mm

称呼 NO.	轴径 S		挡圈尺寸						沟槽尺寸				压平 负荷 N	轴向 许用负荷 N
			内径		外径		板厚		弯曲高		槽径			
	以上	以下	D1	公差	D2	t	公差	H	G	公差	W	公差		
BE-20	2.4	3.0	1.95	+0.05 -0.07	4.60	0.50	±0.03	0.64	2.0	+0.05 -0	1.14	+0.07 -0	265	343
BE-24	2.9	3.8	2.35		6.00	0.60	±0.04	0.64	2.4		1.24		245	490
BE-28	3.3	4.2	2.74		6.50	0.60		0.64	2.8		1.24		216	559
BE-32	3.8	4.7	3.14		7.20	0.60		0.64	3.2		1.24		186	647
BE-37	4.3	5.3	3.64		8.00	0.70		0.64	3.7		1.34		441	853
BE-40	4.8	6.3	3.93		10.00	0.70		0.64	4.0		1.34		402	951
BE-42	5.0	6.4	4.13		10.00	0.70		0.64	4.2		1.34		314	980
BE-50	5.8	7.3	4.93	+0.07 -0.10	11.00	0.70		±0.05	0.64	5.0	+0.07 -0	1.34	+0.07 -0	284
BE-58	6.6	8.2	5.73		12.00	0.70	0.64		5.8	1.34		206		1313
BE-60	6.9	8.6	5.93		12.70	0.90	0.64		6.0	1.54		353		2205
BE-64	7.3	9.1	6.32		13.50	0.90	0.64		6.4	1.54		373		2333
BE-74	8.4	10.3	7.31		15.00	0.90	0.64		7.4	1.54		353		2685
BE-80	9.2	11.3	7.91		16.50	1.00	0.64		8.0	1.64		490		3234
BE-85	9.6	12.0	8.40		17.00	1.00	0.64		8.5	1.64		539		3332
BE-98	11.0	13.3	9.69	+0.08 -0.10	19.00	1.10	±0.05	0.90	9.8	+0.07 -0	2.00	+0.07 -0	539	4214
BE-100	11.3	13.8	9.88		19.50	1.10		0.90	10.0		2.00		490	4410
BE-110	12.4	15.2	10.88		22.00	1.20		0.90	11.0		2.10		588	5194
BE-120	13.5	16.5	11.87		24.00	1.30		0.90	12.0		2.20		618	6174
BE-140	14.8	19.3	13.86		28.00	1.30		0.90	14.0		2.20		618	6762
BE-160	18.0	22.0	15.85		32.00	1.30		0.90	16.0		2.20		539	8233
BE-180	20.3	24.8	17.84		36.00	1.50		0.90	18.0		2.40		588	10781
BE-210	23.7	29.0	20.83	42.00	1.50	0.90	21.0	2.40	539	12545				